

通用照明系列产品

General Lighting Series




深圳市光脉电子有限公司

SHENZHEN GUANGMAI ELECTRONICS CO.,LTD.

地址: 深圳市宝安区福永街道桥头社区金港科技园B栋4-5楼
电话: 0755-23499599 传真: 0755-23497717
QQ: 2850636558 邮箱: 2850636558@qq.com
联系人: 叶先生 18923790101
网址: www.szgmled.com

Address: B Building, Jingang Tech Park, Fuyong, Baoan District, Shenzhen
Tel: 0086-0755-23499599 Fax: 0086-0755-23497717
QQ: 2850636558 E-mail: 2850636558@qq.com
Contact: Bill Ye 0086-18923790101
Website: www.szgmled.com

WWW.SZGMLED.COM

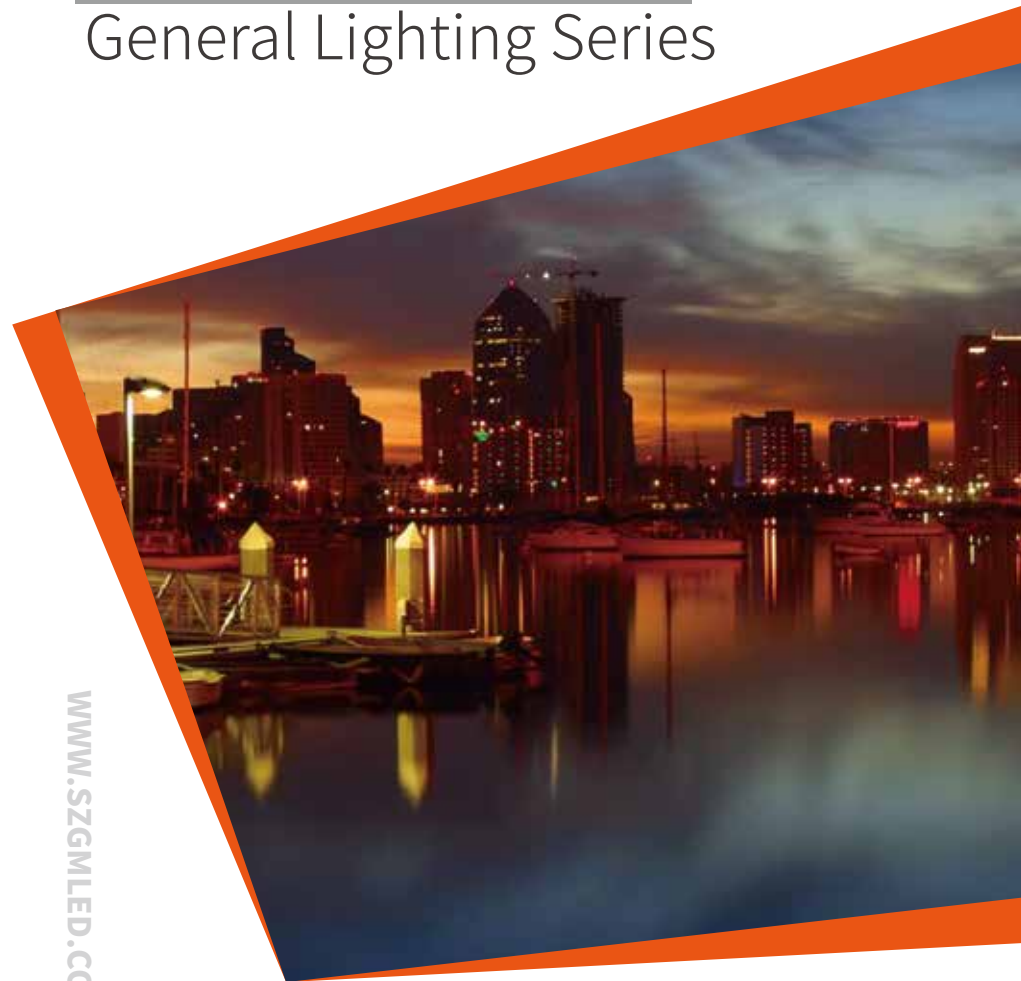



General Lighting-Ceramics 3535/3030 通用照明-陶瓷3535/3030

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

交期定制 | Due Date Customization

根据客户订单需求快速提供样品, 批量供货交期

According to the customer order demand quick corresponding sample, the batch supply delivery time

陶瓷3535/3030

Ceramics 3535/3030

产品特征

- LM-80认证
- 支持表面贴装技术 (SMT)
- 低热阻耐高电流驱动, 发光面积小, 使用功率高, 对照度有较高要求的最佳选择
- 抗冷热变化能力极强, 耐高温和耐低温能力最佳选择适用在极端的恶劣的环境下使用



工业照明
Industrial
Lighting



体育场馆照明
Stadium
Lighting



工矿灯
High Bay



舞台灯
Stage Lamp



车灯
Auto Lamp



便携式照明
Portable Light




Features

- LM80 Certificate
- Support Surface Mount Technology (SMT)
- Low thermal resistance, high current drive resistance, small light-emitting area, high power, the best choice for high contrast requirements
- Extremely strong resistance to cold and heat changes, the best choice for high temperature and low temperature resistance, suitable for use in extreme harsh environments



产品型号 LED Type	封装 Package	功率(w) Power	电流 (mA) Electricity	电压 (V) Voltage	色温 (K) CCT	光通量(lm) Flux	发光颜色 Color
GT-3535W3-10170-OSR40M	陶瓷3535	1	350	2.8-3.4	2800-7000	130-160	W
	陶瓷3535	3	700	3.2-3.6	2800-7000	220-270	W
GF-3535W3-10110-DH55G	共晶3535	1	350	2.8-3.4	2800-7000	150-180	W
	共晶3535	5	1500	3.2-3.6	2800-7000	500-600	W
GF-3535W3-10140-DH43M	陶瓷3535	1	350	2.8-3.4	2800-7000	150-180	W
	陶瓷3535	3	700	3.2-3.6	2800-7000	220-270	W
GT-3030W3-10160-OSR40M	陶瓷3030	1	350	2.8-3.4	2800-7000	150-180	W
	陶瓷3030	3	700	3.2-3.6	2800-7000	220-270	W

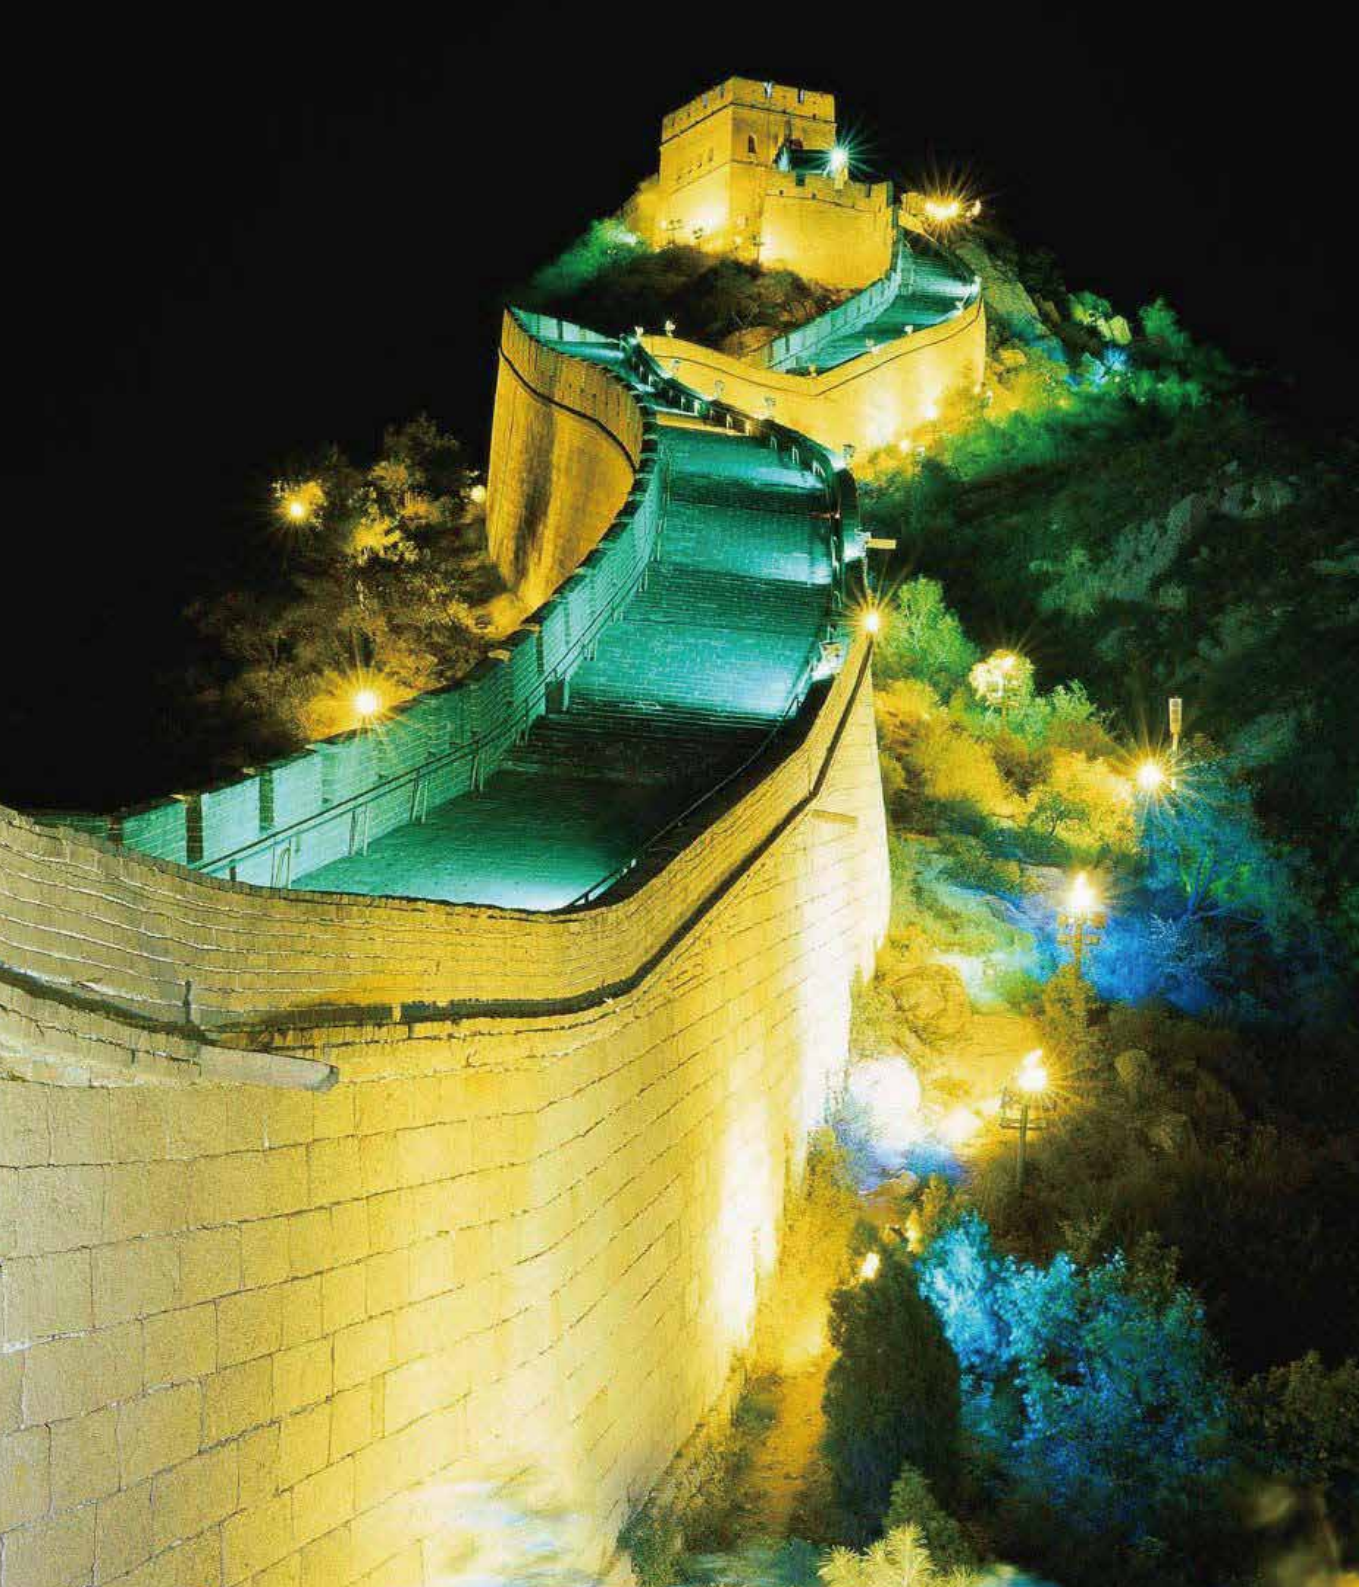

General Lighting-Ceramics 5050 通用照明-陶瓷5050

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

陶瓷5050

Ceramics 5050

产品特征

- LM-80认证
- 高亮度, 高光效, 高可靠性
- 高电流密度输出非常便于紧凑型, 便携式灯具设计使用
- 颜色采用主流颜色为基础让人眼体验最佳的光品质
- 低热阻耐高电流驱动, 发光面积小, 使用功率高, 对照度有较高要求的最佳选择



便携式照明
Portable Light



舞台灯
Stage Lamp



投影仪
Projector




特殊照明效果
Special Effects
Lighting



Features

- LM80 Certificate
- High luminous flux,high efficacy,high reliability
- High current density output is very convenient for compact, portable lighting designs
- The color is based on mainstream color, allowing the eye to experirnce the best light quality
- Low thermal resistance, high current drive resistance, small light-emitting area, high power, the best choice for high contrast requirements



产品型号 LED Type	封装 Package	功率(w) Power	电流(mA) Electricity	电压(V) Voltage	色温/波长(nm) Wavelength	光通量(lm) FLUX	发光颜色 Color
GD-5050W6-10800-05763M	陶瓷5050	10	3000	3.2-3.8	3000-7000K	800-1000	W
GD-5050W6-40800-SA38M	垂直四芯5050	10	3000	3.2-3.8	3000-7000K	800-1000	W
GD-5050W6-40800-LD55G	共晶四芯5050	20	6000	3.2-3.8	3000-7000K	1500-2000	W



General Lighting-3030/EMC5050 通用照明-3030/EMC5050

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

3030

3030

产品特征 | Features

- LM-80认证
- 高光效可达230lm/w
- 高性价比户外光源替代方案
- 出色的抗UV表现
- LM80 Certificate
- High flux efficiency up to 230lm/w
- Alternative solutions for outdoor lighting
- Excellent Anti-UV performance



泛光灯
Flood Lamp



路灯
Street Light



工矿灯
High Bay

产品型号 LED Type	封装 Package	功率 (w) Power	电流 (mA) Electricity	电压 (V) Voltage	色温 (K) CCT	光通量 (lm) FLUX	发光颜色 Color
GS-3030W6-20120-P2630B	PCT3030	1	150	5.8-6.4	2800-7000	120-170	W
GS-3030W6-20130-P2630C	PCT3030	1	350	3.0-3.4	2800-7000	130-180	W



5050EMC

5050EMC

产品特征 | Features

- LM-80认证
- 1-5W功率选择
- 整灯180lm/w光效方案
- 工程项目补贴首选
- 采用低电流驱动芯片定做, 让光效极致化
- 采用对称焊盘, 散热更彻底, 光型更均匀
- LM80 Certificate
- Power: 1-5W
- Lamp Efficiency can up to 180lm/w
- Perfect choice for lighting project
- Customized with low current drive chip to maximize the light effect
- Using symmetrical pads, the heat dissipation is more thorough, and the light pattern is more uniform




泛光灯
Flood Lamp



路灯
Street Light



工矿灯
High Bay



产品型号 LED Type	显指 Ra	功率 (w) Power	电流 (mA) Electricity	电压 (V) Voltage	色温 (K) CCT	光效 (lm/w) FLUX	发光颜色 Color
GE-50501WW3-80170-P2630M	70	1-5	180-850	5.8-6.2	2800-7000K	220	W
GE-50502WW3-80220-P2630M	80	1-5	180-850	5.8-6.2	2800-7000K	190	W
GE-50503WW3-80340-P2630M	90	1-5	180-850	5.8-6.2	2800-7000K	140	W



General Lighting-2835 通用照明-2835

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

交期定制 | Due Date Customization

根据客户订单需求快速提供样品, 批量供货交期

According to the customer order demand quick corresponding sample, the batch supply delivery time

2835白光全光谱

2835 Full Spectrum Of White Light

产品特征

- LM-80认证
- 全功率范围:0.2W-1W
- R1-R5均大于90
- 为室内健康照明提供LED光源解决方案



灯管
Tube Light



平板灯
Panel Light



筒灯
Down Light



球泡灯
Bulb



Features

- LM80 Certificate
- Power:0.2W-1W
- CRI:R1-R5>90
- Provide LED light source solutions for indoor health lighting



产品型号 LED Type	封装 Package	功率(w) Power	电流(mA) Electricity	电压(V) Voltage	显指 Ra	色温(K) CCT	光通量(lm) FLUX	发光颜色 Color
GS-2835W3/6-1020-NWN	PCT2835	0.2	60	3.0-3.4	96	2800-7000	20-30	W
GS-2835W3/6-1060-NWN	PCT2835	0.5	150	3.0-3.4	96	2800-7000	50-70	W



General Lighting-Limiting Lumen 通用照明-仿流明

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

交期定制 | Due Date Customization

根据客户订单需求快速提供样品, 批量供货交期

According to the customer order demand quick corresponding sample, the batch supply delivery time

仿流明

Lmitating Lumen

产品特征

- LM-80认证
- 防紫外
- 红铜支架, 高导热性
- 使用灵活多样, 焊接方便
- 减少光衰, 延长光源使用寿命
- 使用范围广, 适应各种工作环境
- 低阻抗, 高照度, 高光效, 高功率, 高可靠性



路灯
Street Light



射灯
Spot Light



特殊照明效果
Special Effects
Lighting



Features

- LM80 Certificate
- Anti-UV
- Red copper heat sink, high thermal conductivity
- Flexible use and convenient welding
- Reduce light attenuation and prolong the service life of light source
- Wide application range and adaptability to various working environments;
- Low impedance, high illumination, high light efficiency, high power and high reliability



产品型号 LED Type	芯片 CHIP	功率(w) Power	电流(mA) Electricity	电压(V) Voltage	色温(K) CCT	光通量(lm) FLUX	发光颜色 Color
GP-1WW6-11110-J33G	EPISTAR 33mil	1	350	3.0-3.4	2800-7000	110-130	B
GP-1WW6-21150-P2345G	BRIDGELUX 23*45mil*2	1	350	3.0-3.4	2800-7000	150-170	DR
GP-1WW6-11130-P45G	BRIDGELUX 45mil	1	350	3.0-3.4	2800-7000	130-170	FR
GP-1WW6-61170-P2630G	BRIDGELUX 26*30mil*6	1	120	8.5-9.0	2800-7000	170-200	W
GP-3WW6-11200-P45G	BRIDGELUX 45mil	3	700	3.0-3.8	2800-7000	200-280	W
GP-3WW6-21260-P2345G	BRIDGELUX 23*45mil*2	3	700	3.0-3.4	2800-7000	260-300	W



General Lighting-Integrated 通用照明-集成

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

交期定制 | Due Date Customization

根据客户订单需求快速提供样品, 批量供货交期

According to the customer order demand quick corresponding sample, the batch supply delivery time

直流倒装

DC FLIP CHIP

产品特征 | Features

- LM-80认证
- 过温, 过压, 过流保护
- 无金线封装工艺
- 高PF,可过CE等认证
- 颜色一致性好, 高显色
- 散热好, 寿命长
- LM80 Certificate
- With OTP, OVP, OCP
- No gold wire design
- High PF, CE certificate
- Good color consistency, High CRI
- Good heat dissipation, Long lifespan



路灯
Street Light



泛光灯
Flood Light



特殊照明效果
Special Effects
Lighting





高棚灯
High Bay Light



工矿灯
High Bay



筒灯
Down Light



产品型号
LED Type

功率 (w)
Power

电流 (mA)
Electricity

电压 (V)
Voltage

色温 (K)
CCT

光通量 (lm)
FLUX

GF-10WW6-P40-C20

10

900

9-11

2600-7000

1000-2000

GF-20WW6-P40-C20



20

600

28-34

2600-7000

2000-2400



产品型号
LED Type

功率 (w)
Power

电流 (mA)
Electricity

电压 (V)
Voltage

色温 (K)
CCT

光通量 (lm)
FLUX

GF-20WW6-P40-C40

20

600

28-34

2600-7000

2000-2400

GF-100WW6-P40-C40


100

3000

28-34

2600-7000

10000-12000



产品型号
LED Type

功率 (w)
Power

电流 (mA)
Electricity

电压 (V)
Voltage

色温 (K)
CCT

光通量 (lm)
FLUX

GF-150WW6-P40-C82

150

4500

28-34

2600-7000

15000-17000

GF-300WW6-P40-C82

300

9000

28-34

2600-7000

30000-36000

集成模块

Integrated module

产品特点 | Features

- LM-80认证
- 5W-500W方案可选
- 更大热通道, 更低散热需求
- 紫铜支架, 更高的热流明
- 更小体积, 更大功率, 更强照度
- LM80 Certificate
- Power:5W-500W
- Larger hot channels, lower thermal resistance
- Red copper substrate, High stabilized performance
- Smaller volume, greater power, greater illumination



泛光灯
Flood Lamp



隧道灯
Tunnel Light



舞台灯
Stage Lamp



路灯
Street Light








高棚灯
High Bay Light



特殊照明效果
Special Effects
Lighting



产品型号 LED Type	芯片 CHIP	功率 (w) Power	电流 (mA) Electricity	电压 (V) Voltage	色温 (K) CCT	光通量 (lm) FLUX
	GP-5WW6-J33T-Z1GL	5	700	6-7	2800-7000	450-500
	GP-5WW6-P2345T-Z1GL	5	700	6-7	2800-7000	600-650
	GP-10WW6-J33T-Z1GL	10	1050	9-11	2800-7000	900-1000
	GP-10WW6-P2345T-Z1GL	10	1050	9-11	2800-7000	1100-1200
	GP-10WW6-J33T-Z1GL	10	1050	9-11	2800-7000	900-1000
	GP-10WW6-P2345T-Z1GL	10	1050	9-11	2800-7000	1100-1200
	GP-20WW6-J33T-Z1GL	20	1750	12-14	2800-7000	1900-2000
	GP-20WW6-P2345T-Z1GL	20	1750	12-14	2800-7000	2150-2350
	GP-80WW6-J33T-Z3GL	80	2800	30-34	2800-7000	7500-8000
	GP-80WW6-P2345T-Z3GL	80	2800	30-34	2800-7000	8600-9400
	GP-80WW6-P45T-Z3GL	80	2800	30-34	2800-7000	8000-8500
	GP-100WW6-J33T-Z3GL	100	3500	30-34	2800-7000	9000-10000
	GP-100WW6-P2345T-Z3GL	100	3500	30-34	2800-7000	10800-14000
	GP-100WW6-P45T-Z3GL	100	3500	30-34	2800-7000	10000-13000
	GP-200WW6-J33T-Z5GL	200	4550	45-50	2800-7000	18000-20000
	GP-200WW6-P2345T-Z5GL	200	4550	45-50	2800-7000	22000-28000
	GP-200WW6-P45T-Z5GL	200	4550	45-50	2800-7000	20000-26000
	GP-300WW6-J33T-Z5GL	300	7000	45-50	2800-7000	28000-30000
	GP-300WW6-P2345T-Z5GL	300	7000	45-50	2800-7000	32000-42000
	GP-300WW6-P45T-Z5GL	300	7000	45-50	2800-7000	30000-39000