

景观亮化系列产品

Landscape Lighting Series




深圳市光脉电子有限公司

SHENZHEN GUANGMAI ELECTRONICS CO.,LTD.

地址: 深圳市宝安区福永街道桥头社区金港科技园B栋4-5楼
电话: 0755-23499599 传真: 0755-23497717
QQ: 2850636558 邮箱: 2850636558@qq.com
联系人: 叶先生 18923790101
网址: www.szgmled.com

Address: B Building, Jingang Tech Park, Fuyong, Baoan District, Shenzhen
Tel: 0086-0755-23499599 Fax: 0086-0755-23497717
QQ: 2850636558 E-mail: 2850636558@qq.com
Contact: Bill Ye 0086-18923790101
Website: www.szgmled.com

WWW.SZGMLED.COM

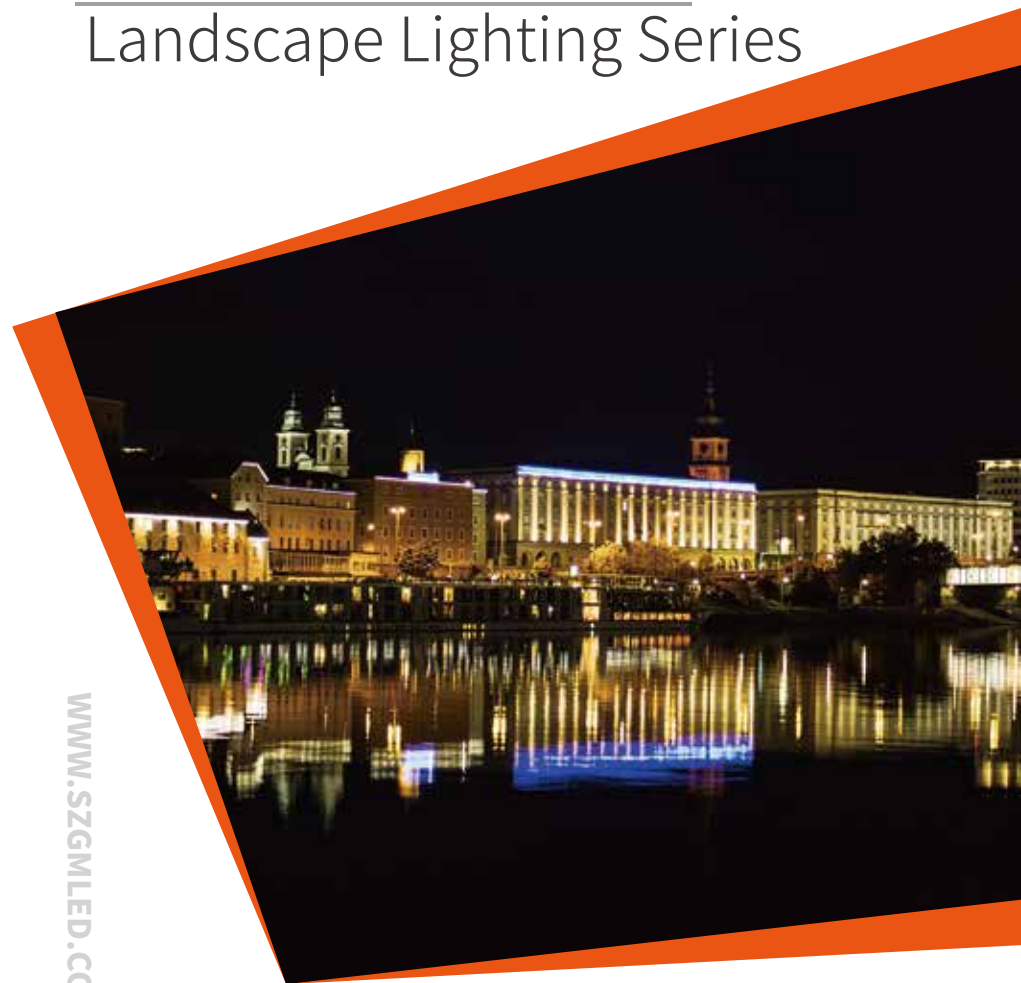



Landscape Lighting-PCT 3030 景观照明-PCT 3030

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

PCT 3030

PCT 3030

产品特征

- LM-80认证
- 高性价比户外光源



洗墙灯
Wall Washer



舞台灯
Stage Lamp



彩灯
RGB



特殊照明效果
Special Effects
Lighting



Features

- LM80 Certificate
- Alternative solutions for outdoor lighting



产品型号 LED Type	封装 Package	功率(w) Power	电流(mA) Electricity	电压(V) Voltage	光色(nm) COLOR	光通量(lm) FLUX	发光颜色 Color
GS-3030B3-2015-G38P	PCT3030	1	350	2.8-3.4	450-470	15-35	B
GS-3030G6-1040-G40P	PCT3030	1	350	2.8-3.4	520-530	40-60	G
GS-3030Y4-1020-G38P	PCT3030	1	350	2.0-2.4	585-595	20-40	Y
GS-3030R2-1020-G38P	PCT3030	1	350	2.0-2.4	620-660	20-30	R



Landscape Lighting-Ceramics 3535

景观照明-陶瓷3535

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

3535单/双色/白光

3535 COLOR/WHITE

产品特征

- LM-80认证
- 高亮度, 高光效, 高可靠性
- 多种光谱组合方案, 颜色可选
- 颜色采用主流颜色为基础让人眼体验最佳的光品质
- 低热阻耐高电流驱动, 发光面积小, 使用功率高, 对照度有较高要求的最佳选择



洗墙灯
Wall Washer



舞台灯
Stage Lamp



彩灯
RGB



特殊照明效果
Special Effects
Lighting



Features

- LM80 Certificate
- High luminous flux, high efficacy, high reliability
- A variety of spectrum available, color optional
- The color is based on mainstream color, allowing the eye to experience the best light quality
- Low thermal resistance, high current drive resistance, small light-emitting area, high power, the best choice for high contrast requirements



产品型号 LED Type	封装 Package	功率 (w) Power	电流 (mA) Electricity	电压 (V) Voltage	色温/波长 (nm) Wavelength	光通量 (lm) FLUX	发光颜色 Color
GT-3535B3-1020-G45M	陶瓷3535	1-3	350-700	3.0-3.6	450-470	20-35	B
GT-3535G6-1060-G45M	陶瓷3535	1-3	350-700	3.0-3.6	520-530	60-100	G
GT-3535Y4-1030-G42M	陶瓷3535	1-3	350-700	2.0-2.6	585-600	30-55	Y
GT-3535R2-1025-G42M	陶瓷3535	1-3	350-700	2.0-2.6	620-660	25-50	R
GT-3535ADW-20110-JN27M	陶瓷3535	1	350	3.0-3.4	3000-3500K	110-160	W
					5500-7000K		W
GT-3535W6-10120-P45M	陶瓷3535	1	350	2.8-3.2	2800-7000K	120-160	W
GT-3535W6-10200-P45M	陶瓷3535	3	700	3.2-3.4	2800-7000K	200-260	W

3535 RGB/RGBW

3535 RGB/RGBW

产品特征

- LM-80认证
- 高亮度, 高光效, 高可靠性
- 多种光谱组合方案, 颜色可选
- 颜色采用主流颜色为基础让人眼体验最佳的光品质
- 低热阻耐高电流驱动, 发光面积小, 使用功率高, 对照度有较高要求的最佳选择



洗墙灯
Wall Washer



舞台灯
Stage Lamp



彩灯
RGB



特殊照明效果
Special Effects
Lighting



Features

- LM80 Certificate
- High luminous flux, high efficacy, high reliability
- A variety of spectrum available, color optional
- The color is based on mainstream color, allowing the eye to experience the best light quality
- Low thermal resistance, high current drive resistance, small light-emitting area, high power, the best choice for high contrast requirements



产品型号 LED Type	封装 Package	功率(w) Power	电流(mA) Electricity	电压(V) Voltage	色温/波长(nm) Wavelength	光通量(lm) FLUX	发光颜色 Color
GT-3535AT1-3020-SA26M	陶瓷3535	1	350	2.8-3.4	B 455-470	20-30	B
				2.8-3.4	G 520-530	90-110	G
				1.8-2.4	R 620-630	40-50	R
GT-3535AT2-4020-SA26M	陶瓷3535	1	350	3.0-3.4	B 455-470	20-30	B
				3.0-3.4	G 520-530	90-110	G
				2.0-2.4	R 620-630	40-50	R
				3.0-3.4	W 3000-7000K	100-130	W



Landscape Lighting-Ceramics 5050

景观照明-陶瓷5050

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

5050 RGBW/RGB

5050 RGBW/RGB

产品特征

- LM-80认证
- 高亮度, 高光效, 高可靠性
- 多种光谱组合方案, 颜色可选
- 颜色采用主流颜色为基础让人眼体验最佳的光品质
- 低热阻耐高电流驱动, 发光面积小, 使用功率高, 对照度有较高要求的最佳选择



洗墙灯
Wall Washer



舞台灯
Stage Lamp



彩灯
RGB



特殊照明效果
Special Effects
Lighting



Features

- LM80 Certificate
- High luminous flux, high efficacy, high reliability
- A variety of spectrum available, color optional
- The color is based on mainstream color, allowing the eye to experience the best light quality
- Low thermal resistance, high current drive resistance, small light-emitting area, high power, the best choice for high contrast requirements



产品型号 LED Type	封装 Package	功率 (w) Power	电流 (mA) Electricity	电压 (V) Voltage	色温/波长 (nm) Wavelength	光通量 (lm) FLUX	发光颜色 Color
GD-5050CT2-4060-SA38M	陶瓷5050	3	700	3.0-3.6	B 460-470	30-40	B
				3.0-3.6	G 520-530	100-200	G
				2.0-2.4	R 620-630	60-100	R
				3.0-3.6	W 3000-7000K	200-260	W
GD-5050CT1-3060-SA38M	陶瓷5050	3	700	3.0-3.6	B 460-470	30-40	B
				3.0-3.6	G 520-530	100-200	G
				2.0-2.4	R 620-630	60-100	R



Landscape Lighting-Limiting Lumen 景观照明-仿流明

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

交期定制 | Due Date Customization

根据客户订单需求快速提供样品, 批量供货交期

According to the customer order demand quick corresponding sample, the batch supply delivery time

仿流明

Lmitating Lumen

产品特征

- LM-80认证
- 防紫外
- 红铜支架, 高导热性
- 减少光衰, 延长光源使用寿命
- 低阻抗, 高照度, 高光效, 高功率, 高可靠性



洗墙灯
Wall Washer



舞台灯
Stage Lamp



泛光灯
Flood Lamp



信号灯
Traffic Signal



Features

- LM80 Certificate
- Anti-UV
- Red copper heat sink, high thermal conductivity
- Reduce light attenuation and prolong the service life of light source
- Low impedance, high illumination, high light efficiency, high power and high reliability



产品型号 LED Type	芯片 CHIP	功率(w) Power	电流(mA) Electricity	电压(V) Voltage	色温(K) CCT	光通量(lm) FLUX	发光颜色 Color
GP-1WW6-11110-J33G	EPISTAR 33mil	1	350	3.0-3.4	2800-7000	110-130	W
GP-1WW6-21150-P2345G	BRIDGELUX 23*45mil*2	1	350	3.0-3.4	2800-7000	150-170	W
GP-1WW6-11130-P45G	BRIDGELUX 45mil	1	350	3.0-3.4	2800-7000	130-170	W
GP-1WW6-61170-P2630G	BRIDGELUX 26*30mil*6	1	120	8.5-9.0	2800-7000	170-200	W
GP-3WW6-11200-P45G	BRIDGELUX 45mil	3	700	3.0-3.8	2800-7000	200-280	W
GP-3WW6-21260-P2345G	BRIDGELUX 23*45mil*2	3	700	3.0-3.4	2800-7000	260-300	W
GP-1WB3-1120-G35G	EPILEDS 35mil	1	350	3.0-3.4	460-470nm	20-40	B
GP-1WG6-1180-G35G	EPILEDS 35mil	1	350	3.0-3.4	520-530nm	80-100	G
GP-1WY2-1140-G38G	EPILEDS 38mil	1	350	2.0-2.4	585-595nm	40-60	Y
GP-1WR2-1140-G30G	EPILEDS 30mil	1	350	2.0-2.4	620-660nm	40-60	R

仿流明

Lmitating Lumen

产品特征

- LM-80认证
- 防紫外
- 红铜支架, 高导热性
- 使用灵活多样, 焊接方便
- 减少光衰, 延长光源使用寿命
- 使用范围广, 适应各种工作环境
- 低阻抗, 高照度, 高光效, 高功率, 高可靠性



洗墙灯
Wall Washer



舞台灯
Stage Lamp



泛光灯
Flood Lamp



信号灯
Traffic Signal



Features

- LM80 Certificate
- Anti-UV
- Red copper heat sink, high thermal conductivity
- Flexible use and convenient welding
- Reduce light attenuation and prolong the service life of light source
- Wide application range and adaptability to various working environments;
- Low impedance, high illumination, high light efficiency, high power and high reliability



产品型号 LED Type	芯片 CHIP	电流 (mA) Electricity	电压 (V) Voltage	光色 (nm) COLOR	光通量 (lm) FLUX
GP-1WRGB-3150-G35G4	EPILEDs 30mil	350	2.0-2.4	R 620-630	40-60
GP-1WRGB-3150-G35G6	EPILEDs 35mil	350	3.0-3.4	G 520-530	80-100
	EPILEDs 35mil	350	3.0-3.4	B 460-470	20-40
	EPILEDs 40mil	350	2.0-2.4	R 620-630	50-60
GP-1WRGBW-G38M8	EPILEDs 38mil	350	3.0-3.4	G 520-530	90-100
	EPILEDs 38mil	350	3.0-3.4	B 460-470	20-30
	EPILEDs 40mil	350	3.0-3.4	W 6000-8000K	100-110



Landscape Lighting-Intergrated Color 景观照明-集成彩光

颜色定制 | Color Customization

根据客户需求制定颜色

Customize colors according to customer needs

成本定制 | Cost Customization

根据客户需求定制相应成本方案

Customize the cost plan according to customer's requirement

10W RGB集成


10W RGB High Power

产品特征

- LM-80认证
- 防紫外
- 红铜支架, 高导热性
- 低阻抗, 高照度, 高光效, 高功率, 高可靠性



泛光灯
Flood Lamp

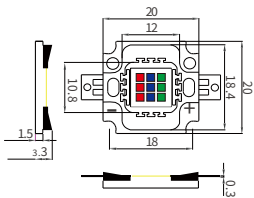

Features

- LM80 Certificate
- Anti-UV
- Red copper heat sink, high thermal conductivity
- Low impedance, high illumination, high light efficiency, high power and high reliability



产品型号 LED Type	功率 (w) Power	电流 (mA) Electricity	电压 (V) Voltage	芯片 CHIP	波段 (nm) WAVELENGTH	光通量 (lm) FLUX	发光颜色 Color
GP-10WR2-G30T-Z1GL	10	1050	6-8	EPILEDs 30mil	620-630	220-280	R
GP-10WG6-G35T-Z1GL			9-11	EPILEDs 35mil	520-530	500-700	G
GP-10WB3-G35T-Z1GL				EPILEDs 35mil	460-470	160-200	B
GP-10WRGB-G35T-Z1GL	10	350	6-8	EPILEDs 30mil	620-630	90-130	R
			9-11	EPILEDs 35mil	520-530	150-200	G
				EPILEDs 35mil	460-470	50-70	B

30-100W RGB集成


30-100W RGB High Power

产品特点

- LM-80认证
- 防紫外
- 红铜支架, 高导热性
- 低阻抗, 高照度, 高光效, 高功率, 高可靠性




泛光灯
Flood Lamp



Features

- LM80 Certificate
- Anti-UV
- Red copper heat sink, high thermal conductivity
- Low impedance, high illumination, high light efficiency, high power and high reliability



产品型号 LED Type	功率(w) Power	电流(mA) Electricity	电压(V) Voltage	芯片 CHIP	波段(nm) WAVELENGTH	光通量(lm) FLUX	发光颜色 Color
GP-30WR2-G30T-Z3GL	30	1050	18-22	EPILEDs 30mil	620-630	800-1200	R
GP-30WG6-G35T-Z3GL			28-32	EPILEDs 35mil	520-530	1500-2500	G
GP-30WB3-G35T-Z3GL				EPILEDs 35mil	460-470	300-500	B
GP-30WRB-G35T-Z3GL	30	350	18-22	EPILEDs 30mil	620-630	350-450	R
			28-32	EPILEDs 35mil	520-530	500-700	G
				EPILEDs 35mil	460-470	140-180	B
GP-50WR2-G30T-Z3GL	50	1750	18-22	EPILEDs 30mil	620-630	1200-2000	R
GP-50WG6-G35T-Z3GL			28-32	EPILEDs 35mil	520-530	3000-4000	G
GP-50WB3-G35T-Z3GL				EPILEDs 35mil	460-470	500-1000	B